

Giraffe® wall and ceiling sander with interchangeable head system

GE 7 + MH-0

Order number 494.461



Technical attributes

Power input	710 watt
Power output	410 watt
No load speed	1100-1650 rpm
Sanding disc Ø	225 mm
Tool fixture	velcro
Tilt angle on the head	100 °
Cable length	5,0 m
Length	1520 mm
Weight	4,2 kg

Standard equipment

1 round sanding head MH-0	457.175
1 clip-on quick clamping ring SH-FC 32	406.023
1 carrying bag	408.867

Giraffe® wall and ceiling sander with interchangeable head system

- + Electronic: controlled constant speed, soft-start, overload protection and speed selection with adjuster wheel
- + Very handy, light-weight machine with optimum ease of operation. Provides comfortable and ergonomic working conditions
- + Fitted with innovative interchangeable head system. Sanding heads are attached and removed with a click
- + Round sanding head for standard grinding of walls
- + Easy guiding: by optimal balance between motor and sanding head
- + Reliable force transmission and high flexibility thanks to the flexible drive shaft from. For decades established "FLEX technology". Thanks to this design principle the weight on the head of the Giraffe is reduced to a minimum. This facilitates handling.
- + Gimbal-mounted sanding head provides high flexibility and optimum adjustment for sanding walls and ceilings.
- + Effective dust extraction from between the brush ring and the sanding pad prevents clogging of the abrasive and promotes a dust-free working environment
- + Option of connecting the FLEX safety vacuum cleaners to the FLEX clip-system on the guide tube
- + Dust-proof on/off switch
- + Very flexible thanks to an optional 500 mm extension (accessory) for high rooms, can be attached without any tools
- + According to the assortment of sanding paper ideally suited for sanding plaster boards, solid styropor insulation slabs, preparation for painting
- + Very large areas and rooms up to 3.40 m in height can be processed thanks to the optional application of the GM 340
- + The innovative, textile transport system allows the machine and accessories to be transported effortlessly. The Giraffe® does not have to be mounted and is immediately ready for use

Accessories

Rotary sanding head with edge segment

Order number 457.183



Technical attributes

QTY/PKG

1

Allows processing of surface transitions from the wall to the ceiling. The rotation of the edge sanding head is induced by the movement of the tool, without interruption of the sanding process. This results in a 5 times faster edge processing. The integrated sliding edges on the sanding head prevent damage to the contact surfaces on the wall and ceiling.

Excentric sanding head

Order number 457.205



Technical attributes

QTY/PKG

1

The innovative excentric sanding head and it's 4 mm stroke effortlessly achieve perfect surfaces in the Q3 and Q4 range. Fast putties, spray fillers and also softer putties and fillers can be grinded with the excentric sanding head efficiently and in a controlled manner. The sanding paper with multi-hole perforation ensures optimum dust extraction and thus comfortable work.

Accessories

Round sanding head

Order number 457.175



Technical attributes


QTY/PKG

1

Optimally suitable for finishing large surfaces on walls and ceilings. Effective dust extraction, high surface removal rate.

Triangular sanding head

Order number 457.191

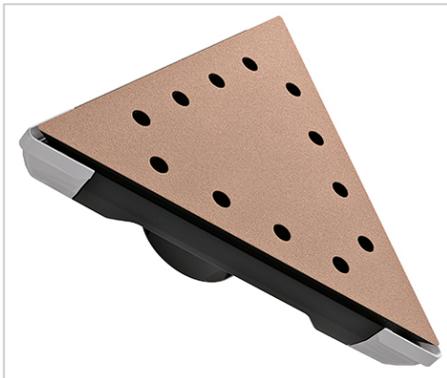

Technical attributes

QTY/PKG


1

Ideal for sanding corners and edges with 4 mm stroke. The orbital movement of the sanding paper guides the abrasive directly to the edge. Due to the large contact surface with respect to hand-held eccentric sanders, a better evenness of the surface is achieved. The rotation of the triangular sanding head adapts to tool movement, which allows sanding of the wall and ceiling transitions without interruption of the operation. With changeable protective corners with sliding strips.

Accessories

Velcro sanding paper SELECTFLEX

Order number 350.079

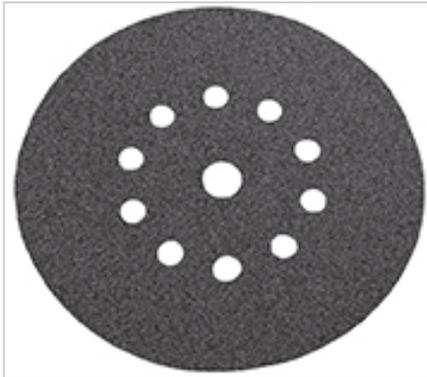

For sanding joint filler in drywall construction, punched for dust extraction.

Technical attributes

Dimensions in mm	225 Ø
Grit	P 16
QTY/PKG	10

Velcro sanding paper SELECTFLEX



For sanding joint filler in drywall construction, punched for dust extraction.

Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
225 Ø	P 40	20	370.924
225 Ø	P 60	25	348.503
225 Ø	P 80	25	348.511
225 Ø	P 100	25	348.538
225 Ø	P 120	25	349.216
225 Ø	P 150	25	349.224
225 Ø	P 180	25	349.232
225 Ø	P 220	25	348.546
225 Ø	5x P 80/100/120/150/180	25	370.932

Accessories

Velcro sanding fleece




Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
225 Ø	A 100	10	281.042
225 Ø	A 180	10	281.034

Pre-sanding, cleaning and matting existing paint coatings prior to repainting (large-vehicles, containers ...)

Velcro sanding paper (perforated)

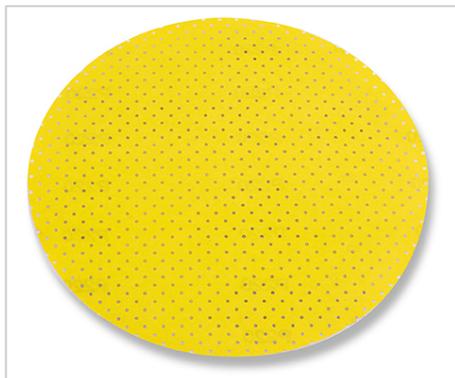

Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
225 Ø	P 40	25	280.739
225 Ø	P 60	25	260.233
225 Ø	P 80	25	260.234
225 Ø	P 100	25	260.235
225 Ø	P 120	25	282.405
225 Ø	P 150	25	311.995
225 Ø	P 180	25	311.987
225 Ø	P 220	25	260.236

For leveling coarse surface irregularities.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Extension

Order number 409.294



Technical attributes

Dimensions in mm	500
QTY/PKG	1

Greater flexibility thanks to the extension, can be operated easily and without any tools. Allows you to work in high rooms.

Auxiliary handle

Order number 408.972



Technical attributes

QTY/PKG	1
---------	---

For effortless working in difficult positions (e.g. overhead work).

Carrying bag

Order number 408.867



Technical attributes

Size (W x L x H)	1560 x 320 x 360 mm
QTY/PKG	1

Light-weight and robust carrying case made of tear-resistant textile material. The Giraffe® is optimally protected by moulded foam parts (optional accessories). With internal storage space for accessories such as sanding tool, suction hose, etc. Large carrying handles facilitate carrying the case, especially up and down stairs.

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Adapter

Order number 409.308



Adapter for GM 320 suitable for the GE 5/R, GE 7.

Technical attributes

QTY/PKG	1
---------	---

Fast clip adapter

Order number 410.497




Change adapter on electric power tools with closed FLEX clip-system for quick and easy detachment/attachment (quick clamping ring).

Technical attributes

QTY/PKG	1
---------	---

Clip-on quick clamping ring red

Order number 406.023

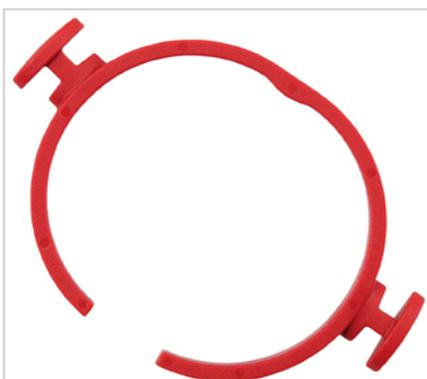

For suction adapter SAD-FC 32 and for GE 5 /R, GSE 5 R.

Technical attributes

QTY/PKG	1
---------	---

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Antistatic suction hose with auxiliary air control

Order number 406.708



Internal Ø 32 mm, 4 m with universal device connection, snap connection and universal adapter (445.029), antistatic. Includes variable adjustment of suction power for reduction of vacuum.


Technical attributes

QTY/PKG

1

Clip adapter

Order number 408.360

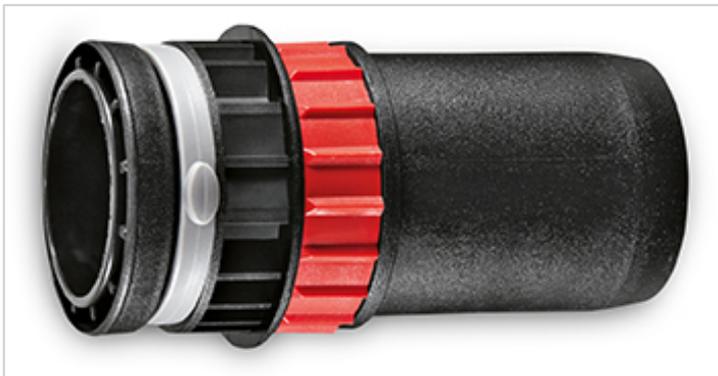

For connecting a FLEX power tool to extraction units from other manufacturers. Suitable for hoses inside Ø 27 mm, outside Ø 36 mm, with auxiliary air adjustment.

Technical attributes


QTY/PKG

1

Accessories

Diamond sanding pad

Order number 419.060

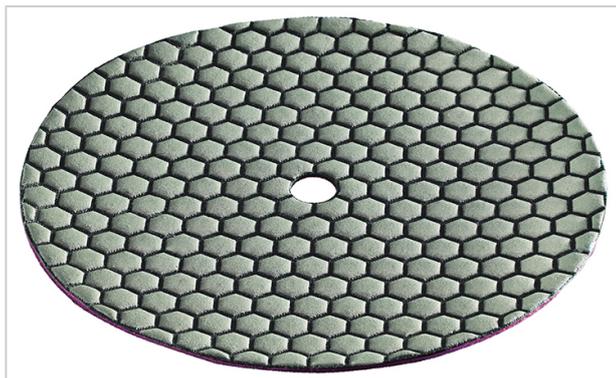


Technical attributes

Dimensions in mm	225 Ø
Grit	30
QTY/PKG	1

For use with velcro sanding pad 225 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing concrete and natural stone surfaces.

Diamond sanding pad

Order number 419.079

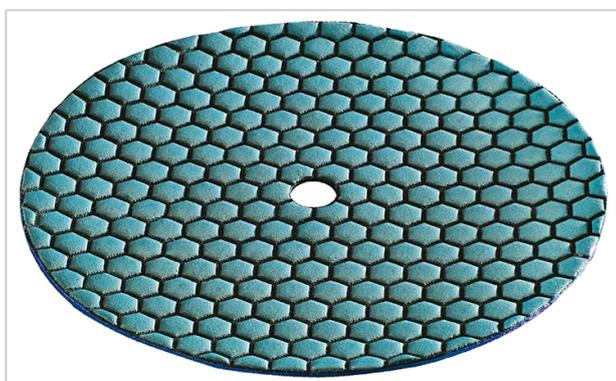

Technical attributes


Dimensions in mm	225 Ø
Grit	50
QTY/PKG	1

For use with velcro sanding pad 225 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing concrete and natural stone surfaces.

Accessories

Diamond sanding pad

Order number 419.087

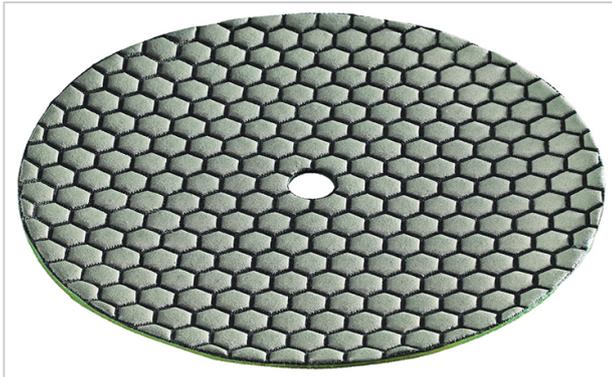


Technical attributes

Dimensions in mm	225 Ø
Grit	80
QTY/PKG	1

For use with velcro sanding pad 225 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing concrete and natural stone surfaces.

Diamond sanding pad

Order number 419.095

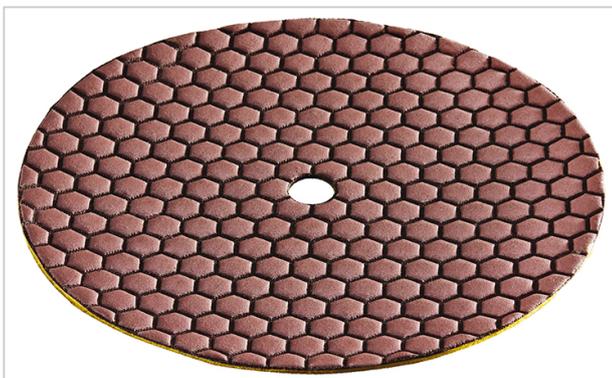


Technical attributes

Dimensions in mm	225 Ø
Grit	100
QTY/PKG	1

For use with velcro sanding pad 225 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing concrete and natural stone surfaces.

Accessories

Velcro sanding grid

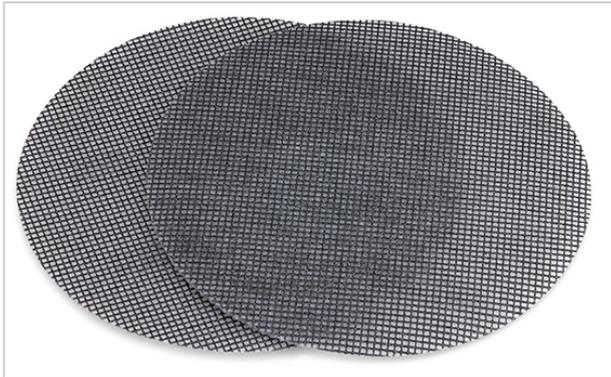

For rapid removal of surface irregularities.

Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
225 Ø	grit 80	25	260.237
225 Ø	grit 100	25	260.230

Insert carrying case head/handle retainer

Order number 505.773



Matching insert for the GE 7, GE 5 / R, GE MH 18.0-EC for the sanding head/handle retainer in the carrying case.

Technical attributes

QTY/PKG	1
---------	---

Interface Ø 225, round

Order number 470.678



Interface as absorbing element between grinding pad and abrasive paper. Ideal for finishing surfaces. Recommendation: work with interface for

Technical attributes

QTY/PKG	2
---------	---

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

in-between and final sanding involving finer grain. Do not work with interface for rough sanding involving coarse grain and when using sanding fleece. For all Giraffes.

Padded adapter for velcro paper

Order number 483.109



Technical attributes

Type	supersoft
Height	16 mm
QTY/PKG	1

Velcro system for attaching the abrasive discs. Suitable for deburring filled-in surfaces. For GE 5 / R, GSE 5 / R, GE 7, GCE 6-EC, GE MH 18.0-EC.

Superfinishing pad



Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
225 Ø	S 320	5	492.264
225 Ø	S 1200	5	492.272

For glossy and high gloss surfaces for filled surfaces.

Accessories

Padded adapter for velcro paper

Order number 483.117



Technical attributes

Type	hard
Height	16 mm
QTY/PKG	1

Velcro system for attachment of sanding tools. Suitable for high removal from different substrates using coarse abrasive grit. For GE 5 / R, GSE 5 / R, GE 7, GCE 6-EC, GE MH 18.0-EC.

Velcro backing pad Ø 225, round

Order number 483.486



Technical attributes

Type	supersoft
QTY/PKG	1

Supersoft. The sanding disc enables extremely gentle positioning on the wall. The set consists of a backing pad, Velcro adapter (KAD D225/16), clamping disc and screw. For GE 5 / R, GSE 5, GE 7, GCE 6-EC, GE MH 18.0-EC.