

Diamond stone cutter for wet cuts, mitre cuts up to 45 °, with GFCI circuit breaker

CS 60 WET

Order number 374.016



Diamond stone cutter for wet cuts, mitre cuts up to 45 °, with GFCI circuit breaker

- + High-performance motor: extra powerful for stone cutting and joint milling
- + Continuous cut depth setting from 0-60 mm, with rail guide up to 54 mm. In the mitre cut from 0-44 mm, with guide rail up to 38 mm
- + Continuous angle adjustment for mitre cuts from 0-45°
- + Cut marking at the base plate from 0°/30°/45° for rapid orientation
- + High-quality magnesium die-castings for protective cover and base plates
- + Motor protection made of rubber prevents the direct intake of spray water
- + Water supply: for an effective cooling of the diamond blade
- + Quick-fit brass coupling: for 1/2" water hose
- + GFCI operator protector circuit breaker: integrated in cord
- + Ideal for: Inserting water grooves in window sills or steps, work tops, facade slabs, terrazzo slabs in garden design & landscaping, joint renovation in the floor
- + Spindle lock

Technical attributes

Power input	1400 watt
Power output	840 watt
No load speed	6200 rpm
Diamond cutting disc Ø / arbor (inside Ø)	170 / 22,2 mm
Cutting depth / with guide rail	60 / 54 mm
Mitre cuttings	0-45 °
Depth of cut - mitre cut	5-44 mm
Depth of cut - mitre cut with guide rail	0-38 mm
Cable length	4,0 m
Size (W x L x H)	360 x 280 x 170 mm
Weight	4,5 kg

Standard equipment

1 diamond cutting disc with segmented cutting edge	347.515
1 wrench for saw blade change	359.343
1 parallel guide fence	350.613
1 carrying case L-BOXX® 238	414.093
1 case insert	436.771

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Diamond cutting disc

Order number 347.515



With segmented cutting edge, vibration-dampened. For granite, marble, sandstone, concrete.

Technical attributes

Dimensions in mm	170 Ø x 22,2
QTY/PKG	1

Diamond cutting disc

Order number 367.214



With closed cutting edge for a clean wet-cut, suitable for tiles, marble plates and ceramics.

Technical attributes

Dimensions in mm	170 Ø x 22,2
QTY/PKG	1

Diamond cutting disc

Order number 386.189



With turbo segments for a clean wet cut; suitable for tiles and fine stoneware of any thickness up to hardness 5, marble, slate, granite

Technical attributes

QTY/PKG	1
Dimensions in mm	170 Ø x 22,2

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

and natural stone.

Guide rail GRS

Order number 353.280



Precise aluminium profile with anodized sliding coating and guide rib. Plugged rubber lip as contact edge at the marking, anti slip protection on the bottom. Connector 353.272 can be used to extend the guide rails as required.

Technical attributes

Length in mm	800
QTY/PKG	1

Guide rail GRS

Order number 359.351



Precise aluminium profile with anodized sliding coating and guide rib. Plugged rubber lip as contact edge at the marking, anti slip protection on the bottom. Connector 353.272 can be used to extend the guide rails as required.

Technical attributes

Length in mm	1600
QTY/PKG	1

FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Connector for guide rail GRS

Order number 353.272



Precise metal connector for connecting two guide rails GRS. When not in use, the connector can be parked in the guide rail with the included tool wrench SW 5 - screw driver.

Technical attributes

QTY/PKG	1
---------	---

Trolley L-BOXX®

Order number 419.400



Trolley for the L-BOXX®es made of plastic with 4 castors, two of which can be locked. Can be loaded up to 100 kg.

Technical attributes

Dimensions in mm	646 x 492 x 182
Weight	3,8 kg
QTY/PKG	1


FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

FLEX

Accessories

Case insert

Order number 436.771

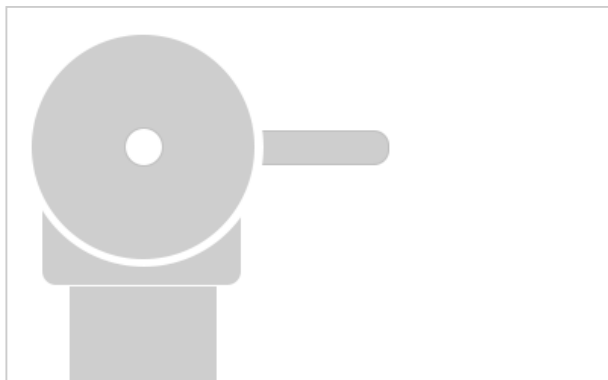

Matching insert for CS 60 WET for carry case L-BOXX® 238.

Technical attributes

QTY/PKG

1