

FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

## Cordless gutter bracket slot cutter 18.0 V

### RFE 40 18.0-EC/5.0 Set

Order number 504.165



#### Cordless gutter bracket slot cutter 18.0 V

- + Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- + Brushless motor with greater efficiency and a longer service life
- + Electronics: Speed preselection with 4 settings, constant speed control by means of tachogenerator, overload protection, restart lock, temperature monitoring and anti-kickback function
- + 4 HSS reversible cutters: the cutters can be reversed, allowing them to be used four times
- + Plane width 40 mm, controlled chip channelling
- + On/Off switch with dead-man function
- + Adjustable to 6 mm and 8 mm thick gutter supports
- + Perfect dust protection thanks to removable protective metal grille
- + LED battery capacity display

#### Technical attributes

Battery voltage	18 V
Battery capacity	2,5 / 5,0 Ah
No load speed	3800-6200 rpm
Planer width	40 mm
Planer depth	6 / 8 mm
No. of cutters	4
Weight without battery	2,96 kg

#### Standard equipment

1 set HSS reversible cutters (4 pieces)	241.091
1 torx wrench	258.861
1 open-ended wrench SW 30/17	106.461
2 batteries 5.0 Ah AP 18.0/5.0	445.894
1 charger CA 10.8/18.0	417.882
1 carrying case L-BOXX® 238	414.093
1 case insert	502.820

FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

## Accessories

### Li-Ion rechargeable battery pack 18,0 V

Order number 445.886



#### Technical attributes

Battery capacity	2,5 Ah
Battery voltage	18,0 V
Weight	0,42 kg
QTY/PKG	1

Battery pack Li ion 18.0 V with integrated charge and discharge protection, battery charge indicator, dust and splash protection. Electronic management system (EMS) protects the battery pack, extends the service life, and increases efficiency.

### Li-Ion rechargeable battery pack 18,0 V

Order number 445.894



#### Technical attributes

Battery capacity	5,0 Ah
Battery voltage	18,0 V
Weight	0,72 kg
QTY/PKG	1

Battery pack Li ion 18.0 V with integrated charge and discharge protection, battery charge indicator, dust and splash protection. Electronic management system (EMS) protects the battery pack, extends the service life, and increases efficiency.

FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

## Accessories

### Rapid charger

Order number 417.882



#### Technical attributes

QTY/PKG

1

For charging 10.8 and 18.0 V battery packs. With large-format LCD display for battery diagnostics and charge levels. Charging time 10.8 V approx. 40 min. for 2.5 Ah / 4.0 Ah and approx. 55 min. for 6.0 Ah batteries. Charging time 18 V: approx 40 min for 2.5 Ah and approx 45 min for 5.0 Ah. A special procedure charges 80% of the capacity after about 30 min. With integrated battery pack cooler and overheating, discharge, and overload protection.

### Power 55 R

Order number 491.349



#### Technical attributes

QTY/PKG

1

Set consisting of a 10.8/18.0 V rapid charger and two 5.0 Ah 18.0 V battery packs.

FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

## Accessories

### Power 22 Q

Order number 491.357



Set consisting of a 18.0 V charger and two 2.5 Ah 18.0 V battery packs.

#### Technical attributes

QTY/PKG	1
---------	---

### HM reversible blades

Order number 229.555




#### Technical attributes

Dimensions in mm	21 x 21
QTY/PKG	4

### HSS reversible blades

Order number 241.091

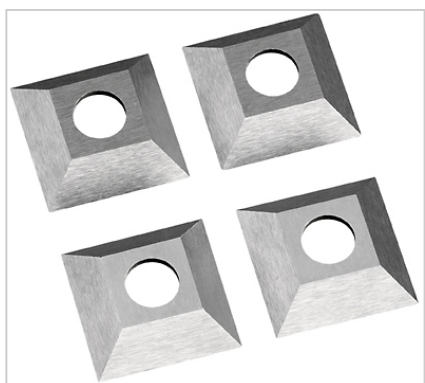

#### Technical attributes

Dimensions in mm	21 x 21
QTY/PKG	4

FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

## Accessories

### Carrying case L-BOXX®

Order number 414.093




#### Technical attributes

External dimensions L x W x H	442 x 357 x 253 mm
Internal dimensions L x W x H	378 x 306 x 209 mm
Weight	2,8 kg
QTY/PKG	1

The robust storage and transport system L-BOXX® made of impact-resistant plastic conveys tools, accessories and consumables easily and comfortably to the place of use. Elaborate inserts provide order and clarity, ergonomically shaped handles and additional moulded recesses for flexible and comfortable handling. The unbeatably simple connection and disconnection of the different L-BOXXes optimises combined transportation. Fits the TÜV-tested in-vehicle equipment system from Sortimo perfectly and without adapters. Load capacity per L-BOXX® up to 25 kg, combined transportation up to 40 kg, the cover can be loaded up to 100 kg. Splash-proof. Without insert.

### Case insert

Order number 502.820

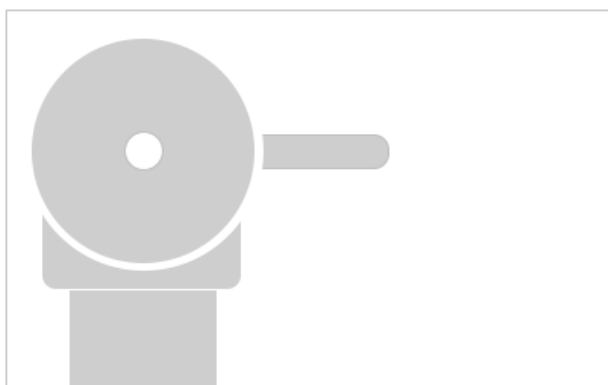

#### Technical attributes

QTY/PKG	1
---------	---

Matching insert for RFE 40 18.0-EC for carry case L-BOXX® 238.